

FabrixTM Modular Corner Load



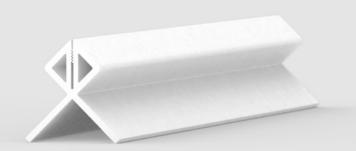

The Modular Corner Load joins the fabric at outside corners. The fabric sits tightly in between the teeth of the track. The teeth are serrated downwards to keep the fabric from slipping out. The track features an anti-warp feature to prevent an imprint on the fabric, and also an anti-slip feature to adhere better to surfaces. Taller tracks have additional support structures added to reinforce stability.



Technical Specifications

| Material | Polymer |
|------------------------|--|
| Standard Dimension | 2000mmL |
| Standard Height | 12mm |
| Standard Thickness | 2mm |
| Toxicity Emission Test | BS 6853 Annex B = R < 1.0 |
| Fire-Rated Test | EN 13501-1 = Class B s1, d0 |
| Acoustic Test | ASTM C423-09a = NRC 0.52 (with 12mm Acoustic Foam) |